


Cable display rack RCL19

To assess offcuts and to present them at the time of selling

- Modular system that allows adjusting the rack to one's requirements
 - There are 2 types of rows: outbound and series.
 - The rack begins from a outbound row and is completed by one or several series rows.
 - Row of 1,900: **12 arms**
 - Useful width: **1900 mm**
 - Height: **2,100 mm**
 - Depth: **620 mm / 260 mm**
 - Width of ladders: **56 mm**
 - Inclined row
 - Adjustable system: the position of the galvanised vertical slides is changeable on the red horizontal stacks and the position of the arms is adjustable on the vertical slides
 - The arms (length 440 mm) are inclined at an angle of 10° towards the rear
 - The maximum load per arm is **80 kg** (approximately 5 heavy coils)
 - the arms are delivered without label holder (optional)
 - Made of steel, galvanised and epoxy finish red RAL 3020
 - Fixing to the floor **mandatory**
 - Delivered in dismantled conditions
- Optional: additional arm (code **RCLBRAS**)
 Label holder 120x80mm (code **RCLETIQ**)

Never again !

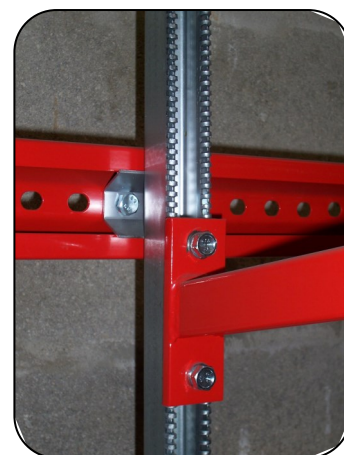

	Width Out-to-out	Code
Row Outbound	2.012mm	RCL19D
Row series	1.956mm	RCL19S



Enrouleurs - Dérouleurs - Métreuses - Protège-câbles

21 rue Sadi Carnot 94880 NOISEAU
(France)

Tel : (33) 01 45 90 14 14

Fax : (33) 01 45 90 17 17

contact@cable-equipements.com



MANUTENTION DES CABLES



ALIMENTATIONS ELECTRIQUES



PROTECTION DES CABLES



FILAGE - TIRAGE



www.cable-equipements.com