

Rack à tourets LEGER

Cable drum rack light version for MANUAL USE

Height of ladder 2100mm - Width of racks 500mm - 3 storage levels in each rack

Max. diameter of drums at the top level: 600mm

Max. diameter of drums at the bottom level: 800mm

(in this case only two drums per rack)

Diameter of the axis: 33.7mm

Max. load per level: 50 kg

Two types are available: The **outbound racks** and the **series racks**

Ladders **are delivered assembled** - depth of ladders: 620 mm at the bottom and 260 mm at the top


Vertical adjustment of shoes every 50mm.

Fastening to the ground mandatory using dowels or anchors (U for holding in the pre-drilled floor)

Motorised winding machine are strictly forbidden in front of this model.



Code: **AML1F2135D (Outbound)**
AML1F2135S (Series)

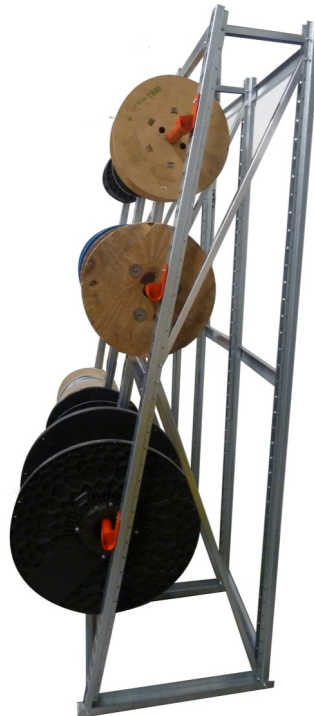

Enrouleurs - Dérouleurs - Métreuses - Protège-câbles

21 rue Sadi Carnot 94880 NOISEAU
(France)

Tel : (33) 01 45 90 14 14

Fax : (33) 01 45 90 17 17

contact@cable-equipements.com

www.cable-equipements.com



MANUTENTION DES CABLES



ALIMENTATIONS ELECTRIQUES



PROTECTION DES CABLES



FILAGE - TIRAGE

